

TOOLS REQUIRED FOR ASSEMBLY



LEVEL



STUD FINDER



PHILLIPS
SCREWDRIVER



DRILL




DRILL
BITS

INCLUDED ITEMS

TBMNT10356H


WALL MOUNT (X1)



SCREW CAPS (X4)



NAME PLACARD
MOUNT (X1)



LARGE SCREWS (X2)



SMALL SCREWS (X1)



LARGE ANCHORS (X3)



SMALL ANCHORS (X2)



TBMNT10356H-SHLF


WALL MOUNT (X1)



SCREW CAPS (X4)



NAME PLACARD
MOUNT (X1)



9 FIG FLOATING
SHELF (X1)



LARGE SCREWS (X2)



SMALL SCREWS (X2)



LARGE ANCHORS (X3)



SMALL ANCHORS (X3)




SMALL M3 SCREW (X2)



TBMNT10356H-GWP


WALL MOUNT (X1)



SCREW CAPS (X4)




NAME PLACARD
MOUNT (X1)



10 FIG FLOATING
SHELF (X1)



GWP SHUTTLE
MOUNT (X1)



LARGE SCREWS (X2)



SMALL SCREWS (X4)



LARGE ANCHORS (X3)



SMALL ANCHORS (X5)



SMALL M3 SCREW (X3)



WARNING

**DO NOT USE DRILL TO DO
FINAL TIGHTENING.
DAMAGE TO THE
MOUNTS CAN OCCUR.**

**USE A PHILLIPS
SCREWDRIVER TO TIGHTEN
DOWN THE MOUNTS.**

**ANCHORS ARE INCLUDED
WITH THE SHIP MOUNT BUT IT
IS HIGHLY RECOMMENDED TO
SCREW DIRECTLY INTO STUDS
FOR MAXIMUM STRENGTH.**

STEP 1

Locate a wall stud using a stud finder where you want to display the USS Enterprise. Hold the mount against the wall and use your own level on the flat top surface to ensure it is straight. Mark the mounting holes by pressing a screw or pencil into each hole.

Drill pilot holes using a drill bit slightly smaller than the included large white screws. Begin driving the screws with the drill and a Phillips bit, but **do not fully tighten with the drill to avoid damaging the mount. Finish tightening by hand with a screwdriver** (Fig. 1).

If using wall anchors instead of a stud, follow the same marking process, then drill 1/4" pilot holes. Insert the included anchors and tap them flush with the wall using a rubber mallet if needed. Then install the screws as described above.

Once secured, press the included screw caps into place to conceal the screws. The caps have small notches for easy removal if needed. (Fig. 2).

You can now mount the USS Enterprise in either the left or right orientation.

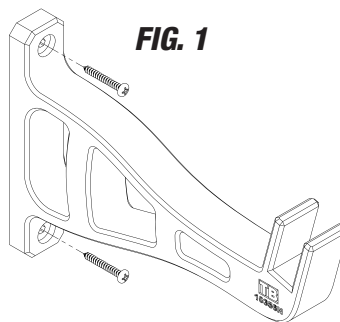


FIG. 1


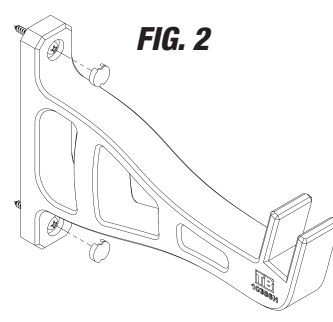



FIG. 2

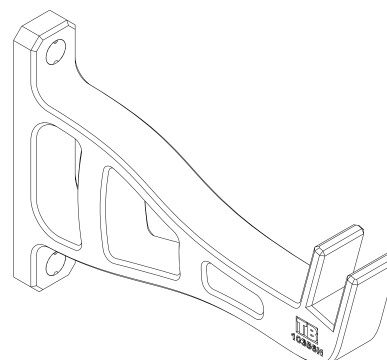

STEP 2

Install the name placard mount in your desired location near the ship. Drill a pilot hole for the small anchor using a 3/16" drill bit. Insert the anchor, then secure the mount with the small screw and a screwdriver while keeping it level. Place the name placard onto the mount.


NAME PLACARD MOUNT



STEP 3


(TBMNT10356H-SHLF) & (TBMNT10356H-GWP) ONLY

Use a small Phillips screwdriver to remove the M3 screw(s) from the bottom of the 9-fig shelf (*TBMNT10356H-SHLF*) or 10-fig shelf (*TBMNT10356H-GWP*).





Position the bracket(s) on the wall where you want the shelf, using a level to keep it straight, and mark the drill holes. (The 10-fig shelf uses two brackets, use the included mounting guide for alignment.)

Drill pilot hole(s) with a 3/16" bit, insert the anchor(s), and tap them flush with a rubber mallet if needed. Secure the bracket(s) with a Phillips screwdriver.



Place the shelf onto the bracket(s) and reinstall the M3 screw(s) from the bottom until snug—do not over tighten. Display your minifigures on the shelf.

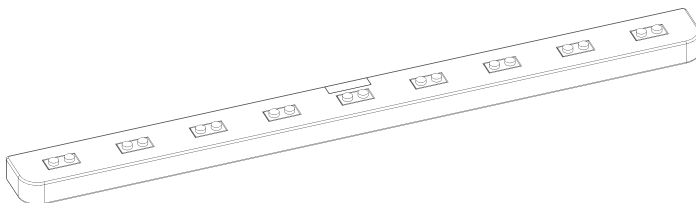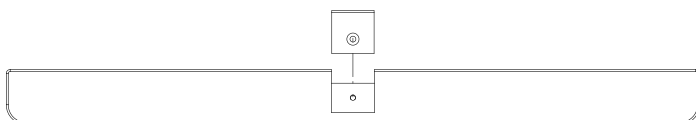

STEP 4

Install the GWP Shuttle mount in your desired location. Drill pilot holes with a 3/16" bit, insert a small anchor, and tap them flush with a rubber mallet if needed. Secure the mount with a small screw using a screwdriver while keeping it level.

Attach the baseplate mount to the arm using the included M3 screw and a small Phillips screwdriver. Mount your GWP shuttle onto the baseplate. (Fig. 1).

GWP SHUTTLE MOUNT


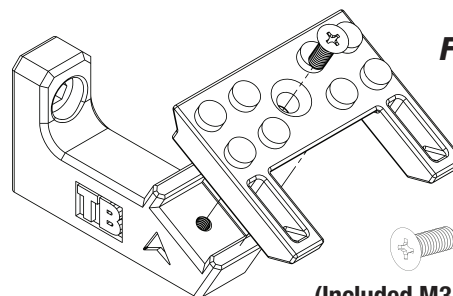


FIG. 1

(Included M3 Screw)

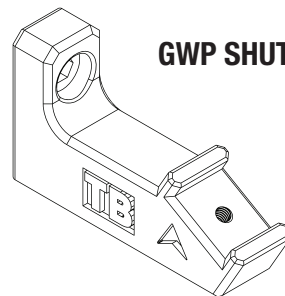