



MOUNTING & ASSEMBLY GUIDE FOR TECHNICALLY BUILT® HORIZONTAL WALL MOUNT FOR LEGO® MARVEL S.H.I.E.L.D. HELICARRIER

TBMNT-76354H / TBMNT-76354H-SHLF

TOOLS REQUIRED FOR ASSEMBLY



LEVEL



STUD FINDER



PHILLIPS
SCREWDRIVER



DRILL




DRILL
BITS

INCLUDED ITEMS

TBMNT-76354H

WALL MOUNT (X1)




MOUNT BRACKET (X1)



SCREW CAPS (X4)



NAME PLACARD
MOUNT (X1)



LARGE SCREWS (X2)



SMALL SCREWS (X1)



LARGE ANCHORS (X3)



SMALL ANCHORS (X2)




M3-18MM SCREW (X2)




TBMNT-76354H-SHLF

WALL MOUNT (X1)




MOUNT BRACKET (X1)




SCREW CAPS (X4)



NAME PLACARD
MOUNT (X1)



TB 6 FIG FLOATING
SHELF (X1)



LARGE SCREWS (X2)



SMALL SCREWS (X2)



LARGE ANCHORS (X3)



SMALL ANCHORS (X3)



M3-18MM SCREW (X2)



M3-6MM SCREW (X1)



STEP 1

Locate a wall stud using a stud finder where you want to display the Helicarrier. Hold the mount against the wall and use your own level on the flat top surface to ensure it is straight. Mark the mounting holes by pressing a screw or pencil into each hole.

Drill pilot holes using a drill bit slightly smaller than the included large screws. Begin driving the screws with the drill and a Phillips bit, but **do not fully tighten with the drill to avoid damaging the mount. Finish tightening by hand with a screwdriver** (Fig. 1).

If using wall anchors instead of a stud, follow the same marking process, then drill 1/4" pilot holes. Insert the included anchors and tap them flush with the wall using a rubber mallet if needed. Then install the screws as described above.

Once secured, press the included screw caps into place to conceal the screws. The caps have small notches for easy removal if needed. (Fig. 2).

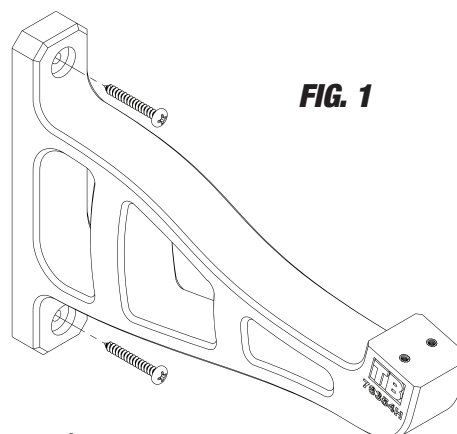


FIG. 1

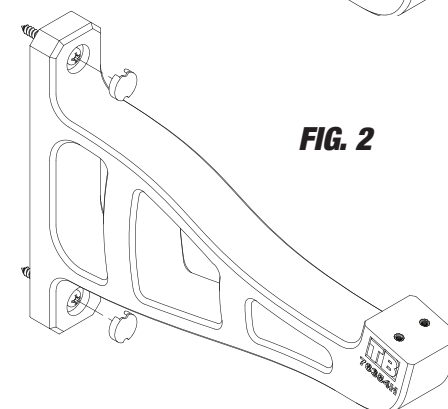


FIG. 2



WARNING



DO NOT USE DRILL TO DO FINAL TIGHTENING.
DAMAGE TO THE MOUNTS CAN OCCUR.

USE A PHILLIPS SCREWDRIVER TO TIGHTEN
DOWN THE MOUNTS.

ANCHORS ARE INCLUDED WITH THE SHIP MOUNT BUT
IT IS HIGHLY RECOMMENDED TO SCREW DIRECTLY INTO
STUDS FOR MAXIMUM STRENGTH.

STEP 2

Using a small phillips screwdriver, (Not Included) install the mount bracket to the wall mount using the two included M3-18mm screws. Make sure the screws are tight but do not overtighten them (Fig. 3).

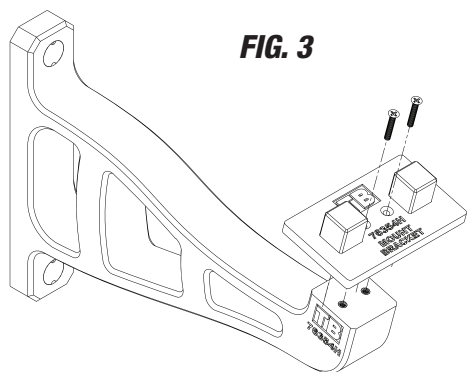


FIG. 3

STEP 3

Hang the S.H.I.E.L.D. Helicarrier on the mount bracket in the original LEGO display stand mounting spots. Ensure the set sits flush onto the mounting bracket before loosening your grip. (Fig. 4).


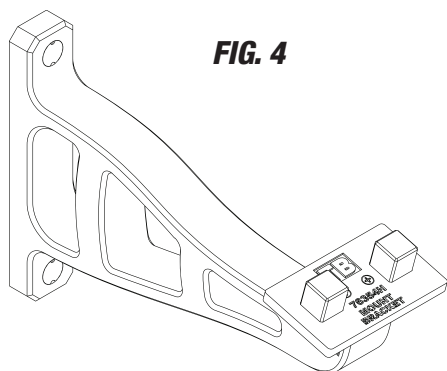


FIG. 4

STEP 4

Install the name placard mount in your desired location near the ship. Drill a pilot hole for the small anchor using a 3/16" drill bit. Insert the anchor, then secure the mount with the small screw and a screwdriver while keeping it level. Place the name placard onto the mount.


NAME PLACARD MOUNT



STEP 5


(TBMNT-76354H) ONLY

Use a small Phillips screwdriver to remove the M3-6mm screw from the bottom bracket of the 6-fig shelf.



Position the bracket on the wall where you want the shelf, using a level to keep it straight, and mark the drill hole.

Drill a pilot hole with a 3/16" bit, insert the anchor, and tap them flush with a rubber mallet if needed. Secure the bracket to the wall with a Phillips screwdriver.



Place the shelf onto the bracket and reinstall the M3-6mm screw from the bottom until snug, To avoid damage DO NOT over tighten. Display your minifigures on the shelf.

